

# **SOLUTIONS@SOURCE**

## *RF Label Specifications*





GEN-LABEL SPEC\_@S\_V02\_011010



Enhanced Performance

## 1915 EP

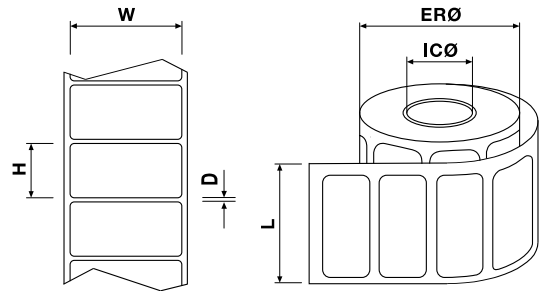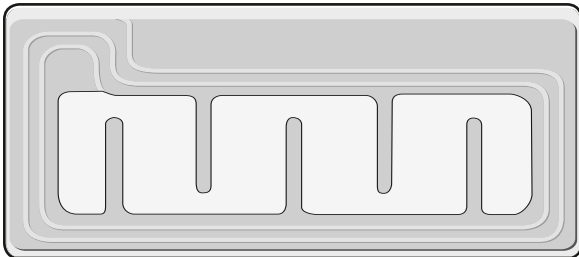

Characteristics	4K = 4,000 Labels
Product Description	1915 EP
Part No:	7242481
Label Dimensions (WxH):	62.10 x 33.50 mm / 2.44" x 1.32"
Distance between labels (D):	2.5 mm / 0.1"
Liner Width (L):	64.10 mm / 2.52"
External Roll Diameter (ER):	Ø 241 mm / 9.50"
Inner Core Diameter (IC):	Ø 76.2 mm / 3"
Face Sheet:	White Thermal Transfer
Adhesive:	Permanent general purpose
Labels per roll:	4,000
Labels per case:	5 x 4K Roll (20,000)
Weight roll:	3.2 kg / 7 lbs
Weight case:	15,87 kg / 35 lbs
Frequency (MHz) +/-5%:	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	4.5Kv (minimum)
*Minimum order quantity (MOQ)	4,000 (1 Roll)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high


\*Unless otherwise specified in contractual conditions

\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.



## 2010 FOOD PET/PET

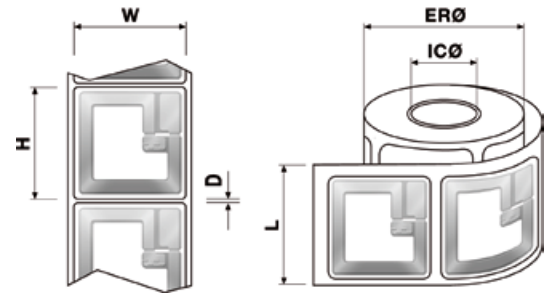

Characteristics	5K = 5,000 Labels
Product Description:	2010 Food PET/PET
Part No:	9162667
Label Dimensions (WxH):	40 x 43 mm / 1.6" x 1.7"
Distance between labels (D):	2.15 mm / 0.08"
Liner Width (L):	42 mm / 1.6"
External Roll Diameter (ER):	Ø 250 mm / 9.8"
Inner Core Diameter (IC):	Ø 76.2 mm / 3"
Face Sheet:	Clear Polyethylene
Adhesive:	Permanent, food grade
Labels per roll:	5,000
Labels per case:	5 x 5K Roll (25,000)
Weight roll:	1.99 kg / 4.38 lbs
Weight case:	10.25 kg / 22.55 lbs
Frequency (MHz) +/-5%:	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	25Kv (minimum)
*Minimum order quantity (MOQ)	5,000 (1 Roll)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high

\*Unless otherwise specified in contractual conditions


\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.

# LABEL SPECIFICATIONS



## 2010 FOOD POLY/POLY

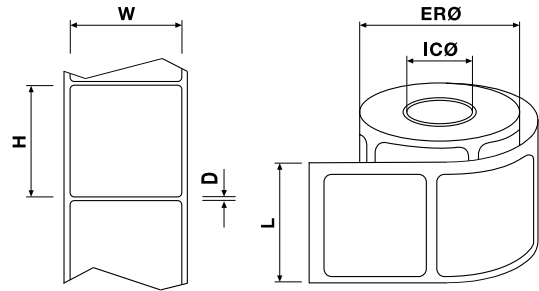

Characteristics	2K = 2,000 Labels	4K = 4,000 Labels
Product Description:	2010 Food Poly/Poly	2010 Food Poly/Poly
Part No:	9164498	9206431
Label Dimensions (WxH):	40 x 43 mm / 1.6" x 1.7"	40 x 43 mm / 1.6" x 1.7"
Distance between labels (D):	2.15 mm / 0.08"	2.15 mm / 0.08"
Liner Width (L):	42 mm / 1.6"	42 mm / 1.6"
External Roll Diameter (ER):	Ø 203 mm / 8.0"	Ø 250 mm / 9.8"
Inner Core Diameter (IC):	Ø 76.2 mm / 3"	Ø 76.2 mm / 3"
Face Sheet:	White Polypropylene	White Polypropylene
Adhesive:	Permanent, food grade	Permanent, food grade
Labels per roll:	2,000	4,000
Labels per case:	10 x 2K (20,000)	5 x 4K (20,000)
Weight roll:	1.25 kg / 2.75 lbs	2.5 kg / 5.5 lbs
Weight case:	12.80 kg / 28.16 lbs	12.70 kg / 27.94 lbs
Frequency (MHz) +/-5%:	8.2 MHz	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	25 Kv (minimum)	25 Kv (minimum)
*Minimum order quantity (MOQ):	2,000 (1 Roll)	4,000 (1 Roll)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high

\*Unless otherwise specified in contractual conditions

\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture



For any questions regarding this or any other labelling process contact your local Checkpoint representative.



# LABEL SPECIFICATIONS



## 2010 FOOD PAPER/PAPER



Characteristics	2K = 2,000 Labels
Product Description	2010 Food Paper/Paper
Part No:	9180063
Label Dimensions (WxH):	40 x 43 mm / 1.6" x 1.7"
Distance between labels (D):	2.15 mm / 0.08"
Liner Width (L):	42 mm / 1.6"
External Roll Diameter (ER):	Ø 203 mm / 8.0"
Inner Core Diameter (IC):	Ø 76.2 mm / 3"
Face Sheet:	White Vellum Paper Uncoated
Adhesive:	Permanent, food grade
Labels per roll:	2,000
Labels per case:	10 x 2K (20,000)
Weight roll:	1.25 kg / 2.75 lbs
Weight case:	12.8 kg / 28.16 lbs
Frequency (MHz) +/-5%:	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	25Kv (minimum)
*Minimum order quantity (MOQ)	2,000 (1 Roll)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high

\*Unless otherwise specified in contractual conditions

\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture


For any questions regarding this or any other labelling process contact your local Checkpoint representative.



# LABEL SPECIFICATIONS



## 2010 FOOD PAPER/POLY

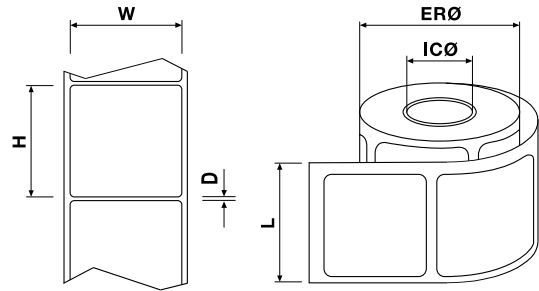

Characteristics	2K = 2,000 Labels	4K = 4,000 Labels
Product description:	2010 FOOD Paper/Poly	2010 FOOD Paper/Poly
Part No:	9167286	9220480
Label Dimensions (WxH):	40 x 43 mm / 1.6" x 1.7"	40 x 43 mm / 1.6" x 1.7"
Distance between labels (D):	2.15 mm / 0.08"	2.15 mm / 0.08"
Liner Width (L):	42 mm / 1.6"	42 mm / 1.6"
External Roll Diameter (ER):	Ø 203 mm / 8.0"	Ø 250 mm / 9.8"
Inner Core Diameter (IC):	Ø 76.2 mm / 3"	Ø 76.2 mm / 3"
Face Sheet:	White Polypropylene	White Polypropylene
Adhesive:	Permanent, food grade	Permanent, food grade
Labels per roll:	2,000	4,000
Labels per case:	10 x 2K (20,000)	5 x 4K (20,000)
Weight roll:	1.25 kg / 2.75 lbs	2.5 kg / 5.5 lbs
Weight case:	12.80 kg / 28.16 lbs	12.70 kg / 27.94 lbs
Frequency (MHz) +/-5%:	8.2 MHz	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	25 Kv (minimum)	25 Kv (minimum)
*Minimum order quantity (MOQ):	2,000 (1 Roll)	4,000 (1 Roll)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high


\*Unless otherwise specified in contractual conditions

\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.



## 2010 FOOD PET/POLY SPOT

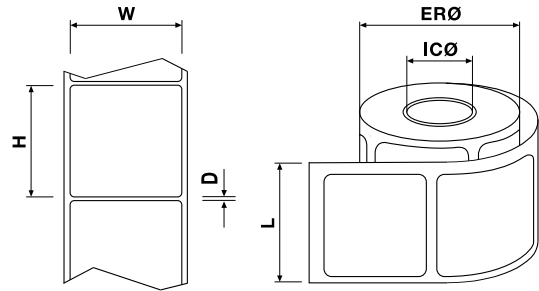

Characteristics	4K = 4,000 Labels
Product Description:	010 FOOD PET / Poly
Part No:	09414972
Label Dimensions (WxH):	52 x 55 mm / 2" x 2.1"
Distance between labels (D):	2.15 mm / 0.08"
Liner Width (L):	55 mm / 2.1"
External Roll Diameter (ER):	Ø 275 mm / 10.83"
Inner Core Diameter (IC):	Ø 76.2 mm / 3"
Face Sheet:	White Polypropylene
Adhesive:	Permanent, food grade
Labels per roll:	4,000
Labels per case:	5 x 4K (20,000)
Weight roll:	2.9 kg / 6.38 lbs
Weight case:	14.5 kg / 31.9 lbs
Frequency (MHz) +/-5%:	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	25 Kv (minimum)
*Minimum order quantity (MOQ)	4,000 (1 Roll)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high

\*Unless otherwise specified in contractual conditions


\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.



Enhanced Performance

## 2410 EP TRAY

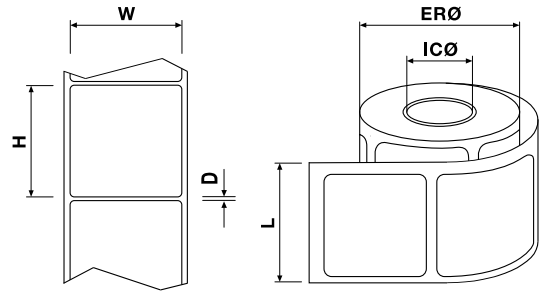

### Characteristics

Product Description:	2410 EP Tray	2410 EP Tray
Part No:	9208432	9208436
Label Dimensions (WxH):	27 x 30 mm / 1.1" x 1.2"	27 x 30 mm / 1.1" x 1.2"
External Roll Diameter (ER):	Ø 70 mm / 2.76"	Ø 70 mm / 2.76"
Inner Core Diameter (IC):	Ø 25 mm / 0.98"	Ø 25 mm / 0.98"
Face Sheet:	White Thermal Transfer	White Thermal Transfer
Adhesive:	Permanent, general purpose	Permanent, general purpose
Labels per roll:	250	250
Labels per case:	8 x 250	15 x 250
Weight roll:	0.85 kg / 1.87 lbs	0.85 kg / 1.87 lbs
Weight case:	0.7 kg / 27 lbs	1.5 kg / 3.3 lbs
Frequency (MHz) +/-5%:	8.2 MHz	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	7.5 Kv (minimum)	7.5 Kv (minimum)
*Minimum order quantity (MOQ)	250 (1 Roll)	250 (1 Roll)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high


\*Unless otherwise specified in contractual conditions

\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.



## 2815 EP

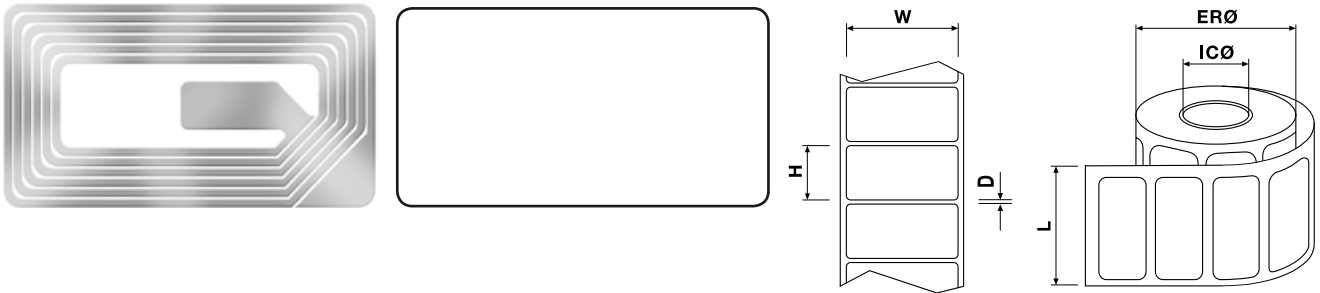

Characteristics	2K = 2,000 Labels	4K = 4,000 Labels
Product Description:	2815 EP	2815 EP
Part No:	7247413	7178327
Label Dimensions (WxH):	49.3 x 26.7 mm / 1.9" x 1.0"	49.3 x 26.7 mm / 1.9" x 1.0"
Distance between labels (D):	2.3 mm / 0.09"	2.3 mm / 0.09"
Liner Width (L):	51.3 mm / 1.6"	51.3 mm / 1.6"
External Roll Diameter (ER):	Ø 178 mm / 7"	Ø 235 mm / 9.25"
Inner Core Diameter (IC):	Ø 76.2 mm / 3"	Ø 76.2 mm / 3"
Face Sheet:	White Thermal Transfer	White Thermal Transfer
Adhesive:	Permanent, general purpose	Permanent, general purpose
Labels per roll:	2,000	4,000
Labels per case:	10 x 2K (20,000)	5 x 4K (20,000)
Weight roll:	1.0 kg / 2.2 lbs	2.1 kg / 4.6 lbs
Weight case:	9.98 kg / 22 lbs	10.40 kg / 23 lbs
Frequency (MHz) +/-5%:	8.2 MHz	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	7,5 Kv (minimum)	7,5 Kv (minimum)
*Minimum order quantity (MOQ)	2,000 (1 Roll)	4,000 (1 Roll)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high

\*Unless otherwise specified in contractual conditions


\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.





## 2933 EP

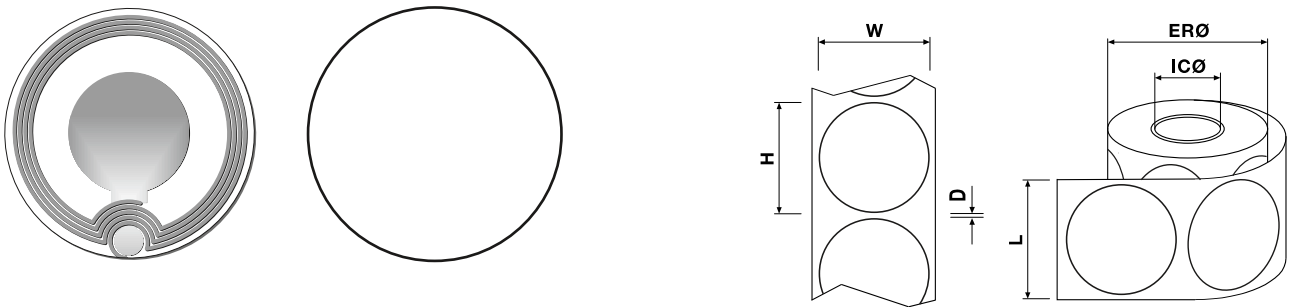

Characteristics	2K = 2,000 Labels
Product Description:	2933 EP 33 mm round
Part No:	7666078
Label Dimensions (Ø):	33 mm / 1.3"
Distance between labels (D):	6.75 mm / 0.266"
Liner Width (L):	34.6 mm / 1.362"
External Roll Diameter (ER):	Ø 195 mm / 7.5"
Inner Core Diameter (IC):	Ø 76.2 mm / 3"
Face Sheet:	White Thermal Transfer
Adhesive:	Permanent, general purpose
Labels per roll:	2,000
Labels per case:	10 x 2K (20,000)
Weight roll:	1.22 kg / 2.7 lbs
Weight case:	12.24 kg / 27 lbs
Frequency (MHz) +/-5%:	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	7.5 Kv (minimum)
*Minimum order quantity (MOQ)	2,000 (1 Roll)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high

\*Unless otherwise specified in contractual conditions


\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.





## 2940 EP

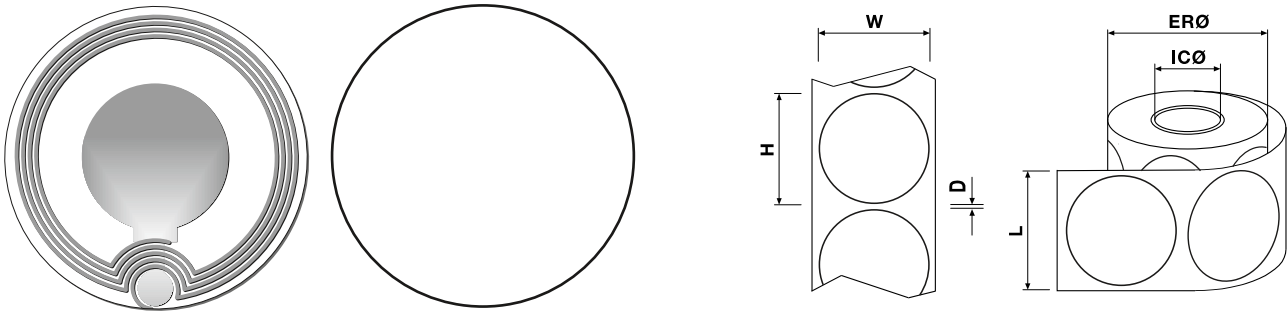

Characteristics	2K = 2,000 Labels	4K = 4,000 Labels
Product Description:	2940 EP 40 mm round	2940 EP 40 mm round
Part No:	7262740	7303963
Label Dimensions (Ø):	42.50 mm / 1.57"	42.50 mm / 1.57"
Distance between labels (D):	2.1 mm / 0.083"	2.1 mm / 0.083"
Liner Width (L):	42.50 mm / 1.67"	42.50 mm / 1.67"
External Roll Diameter (ER):	Ø 195 mm / 7.5"	Ø 260 mm / 10.25"
Inner Core Diameter (IC):	Ø 76.2 mm / 3"	Ø 76.2 mm / 3"
Face Sheet:	White Thermal Transfer	White Thermal Transfer
Adhesive:	Permanent, general purpose	Permanent, general purpose
Labels per roll:	2,000	4,000
Labels per case:	10 x 2K (20,000)	5 x 4K (20,000)
Weight roll:	1.22 kg / 2.7 lbs	2.26 kg / 5.0 lbs
Weight case:	12.24 kg / 27 lbs	11.3 kg / 25 lbs
Frequency (MHz) +/-5%:	8.2 MHz	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	7.5 Kv (minimum)	7.5 Kv (minimum)
*Minimum order quantity (MOQ)	2,000 (1 Roll)	4,000 (1 Roll)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high


\*Unless otherwise specified in contractual conditions

\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.



## 3110 EP

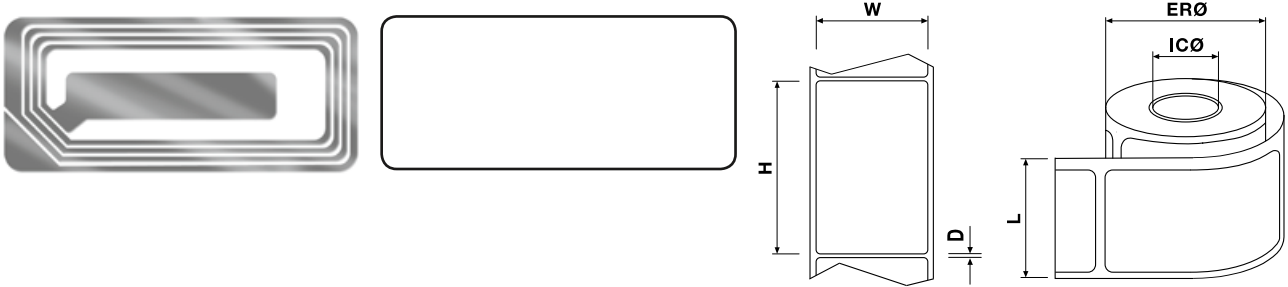

Characteristics	2K = 2,000 Labels	4K = 4,000 Labels
Product Description:	3110 EP	3110 EP
Part No:	7123511	7387589
Label Dimensions (WxH):	22 x 47 mm / 0.866" x 1.85"	22 x 47 mm / 0.866" x 1.85"
Distance between labels (D):	2.30 mm / 0.0906"	2.30 mm / 0.0906"
Liner Width (L):	21 mm / 0.8268"	21 mm / 0.8268"
External Roll Diameter (ER):	Ø 216 mm / 8.5"	Ø 279 mm / 11"
Inner Core Diameter (IC):	Ø 76.2 mm / 3"	Ø 76.2 mm / 3"
Face Sheet:	White Thermal Transfer	White Thermal Transfer
Adhesive:	Permanent, general purpose	Permanent, general purpose
Labels per roll:	2,000	4,000
Labels per case:	10 x 2K (20,000)	5 x 4K (20,000)
Weight roll:	1.13 kg / 2.5 lbs	2.72 kg / 6.0 lbs
Weight case:	11.03 kg / 25 lbs	13.6 kg / 30 lbs
Frequency (MHz) +/-5%:	8.2 MHz	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	7.2 Kv (minimum)	7.2 Kv (minimum)
*Minimum order quantity (MOQ)	2,000 (1 Roll)	4,000 (1 Roll)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high

\*Unless otherwise specified in contractual conditions


\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.



Enhanced Performance

## 3210 EP

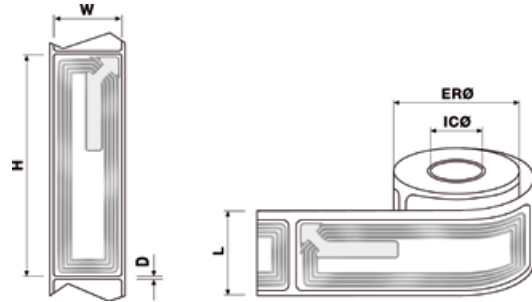

Characteristics	2K = 2,000 Labels
Product Description:	3210 EP
Part No:	7223155
Label Dimensions (WxH):	19 x 65 mm / 0.866" x 1.85"
Distance between labels (D):	2.30 mm / 0.0906"
Liner Width (L):	21 mm / 0.827"
External Roll Diameter (ER):	Ø 216 mm / 8.5"
Inner Core Diameter (IC):	Ø 76.2 mm / 3"
Face Sheet:	Clear Polypropylene
Adhesive:	Permanent general purpose
Labels per roll:	2,000
Labels per case:	10 x 2K (20,000)
Weight roll:	0.90 kg / 1.91 lbs
Weight case:	9.04 kg / 20 lbs
Frequency (MHz) +/-5%:	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	7.2 Kv (minimum)
*Minimum order quantity (MOQ)	2,000 (1 Roll)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high

\*Unless otherwise specified in contractual conditions




\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.





## 410 EP WHITE



Characteristics	2K = 2,000 Labels	4K = 4,000 Labels	8K = 8,000 Labels
Product Description:	410 EP White	410 EP White	410 EPWhite
Part No:	7103188	7332573	7361741
Label Dimensions (WxH):	41 x 41 mm / 1.6" x 1.6"	41 x 41 mm / 1.6" x 1.6"	41 x 41 mm / 1.6" x 1.6"
Distance between labels (D):	2.30 mm / 0.09"	2.30 mm / 0.09"	2.30 mm / 0.09"
Liner Width (L):	41.91 mm / 1.65"	41.91 mm / 1.65"	41.91 mm / 1.65"
External Roll Diameter (ER):	Ø 197 mm / 7.7"	Ø 267 mm / 10.5"	Ø 394 mm / 15.151"
Inner Core Diameter (IC):	Ø 76.2 mm / 3"	Ø 76.2 mm / 3"	Ø 152 mm / 5.98"
Face Sheet:	White Thermal Transfer	White Thermal Transfer	White Thermal Transfer
Adhesive:	Permanent, general purpose	Permanent, general purpose	Permanent, general purpose
Labels per roll:	2,000	4,000	8,000
Labels per case:	10 x 2K (20,000)	5 x 4K (20,000)	3 x 8K (24,000)
Weight roll:	1.174 kg / 2.58 lbs	2.35 kg / 5.18 lbs	4.67 kg / 10.29 lbs
Weight case:	11.74 kg / 25.88 lbs	11.74 kg / 25.88 lbs	14.08 kg / 31.04 lbs
Frequency (MHz) +/-5%:	8.2 MHz	8.2 MHz	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	4.5 Kv (minimum)	4.5 Kv (minimum)	4.5 Kv (minimum)
*Minimum order quantity (MOQ)	2,000 (1 Roll)	4,000 (1 Roll)	8,000 (1 Roll)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high

\*Unless otherwise specified in contractual conditions


\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.





## 410 HA WHITE

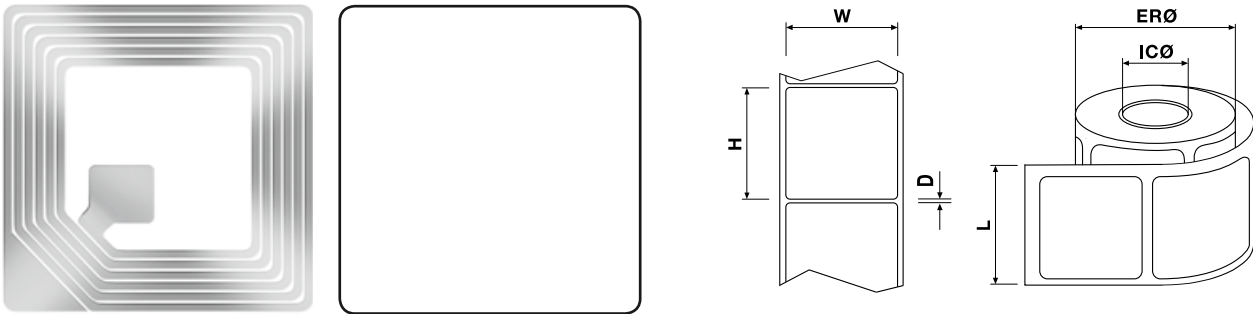

Characteristics	2K = 2,000 Labels
Product Description	410 HA White
Part No:	7551246
Label Dimensions (WxH):	37.72 x 39.83 mm / 1.5 x 1.6"
Distance between labels (D):	2.29 mm / 0.09"
Liner Width (L):	39.37 mm / 1.5"
External Roll Diameter (ER):	Ø 212 mm / 8.4"
Inner Core Diameter (IC):	Ø 76.2 mm / 3"
Face Sheet:	White Uncoated Litho Paper
Adhesive:	Permanent, general purpose
Labels per roll:	2,000
Labels per case:	10 x 2K (20,000)
Weight roll:	1.17 kg / 2.58 lbs
Weight case:	11.75 kg / 25.9 lbs
Frequency (MHz) +/-5%:	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	1.5Kv (minimum)
*Minimum order quantity (MOQ)	2,000 (1 Roll)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high

\*Unless otherwise specified in contractual conditions


\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.





## 410 HA BLACK

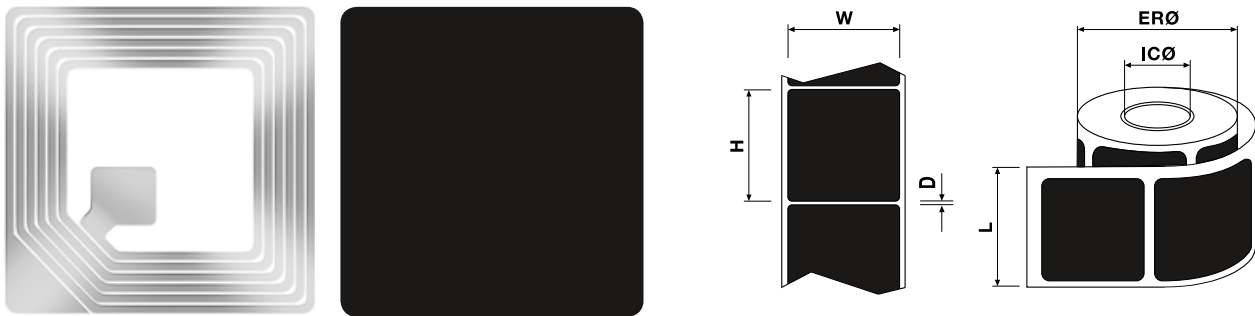

Characteristics	TR = Tray = 2,000 Labels
Product Description	410 HA Black
Part No:	7283986
Label Dimensions (WxH):	37.72 x 39.83 mm / 1.5" x 1.6"
Distance between labels (D):	2.29 mm / 0.09"
Liner Width (L):	39.37 mm / 1.5"
External Roll Diameter (ER):	Ø 98 mm / 3.6"
Inner Core Diameter (IC):	Ø 38 mm / 1.5"
Face Sheet:	Black Uncoated Litho Paper
Adhesive:	Permanent, general purpose
Labels per roll:	500
Labels per case:	500 x 4 x 10 (20,000)
Weight roll:	1.04 kg / 2.3 lbs
Weight case:	10.40 kg / 22.92 lbs
Frequency (MHz) +/-5%:	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	1.5Kv (minimum)
*Minimum order quantity (MOQ)	1 Tray = 4 x 500 (2,000)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high

\*Unless otherwise specified in contractual conditions


\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.





## 410 HA DUMMY BAR CODE (DBC)

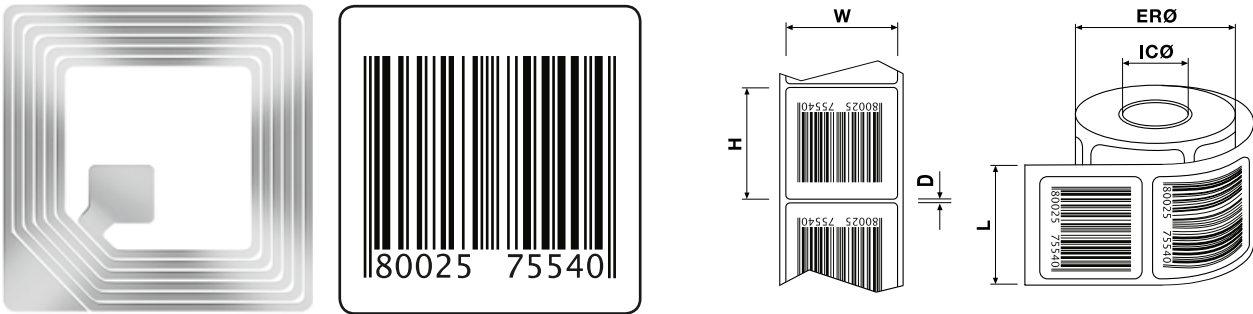

Characteristics	2K = 2,000 Labels
Product Description	410 HA Dummy Bar Code
Part No:	7909949
Label Dimensions (WxH):	37.72 x 39.83 mm / 1.5" x 1.6"
Distance between labels (D):	2.29 mm / 0.09"
Liner Width (L):	39.37 mm / 1.5"
External Roll Diameter (ER):	Ø 212 mm / 8.4"
Inner Core Diameter (IC):	Ø 76.2 mm / 3"
Face Sheet:	Preprinted Uncoated Litho Paper
Adhesive:	Permanent, general purpose
Labels per roll:	2,000
Labels per case:	10 x 2K (20,000)
Weight roll:	1.174 kg / 2.58 lbs
Weight case:	11.75 kg / 25.9 lbs
Frequency (MHz) +/-5%:	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	1.5Kv (minimum)
*Minimum order quantity (MOQ)	2,000 (1 Roll)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high

\*Unless otherwise specified in contractual conditions



\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.






## 615 SHOE LABEL SPECIFICATIONS

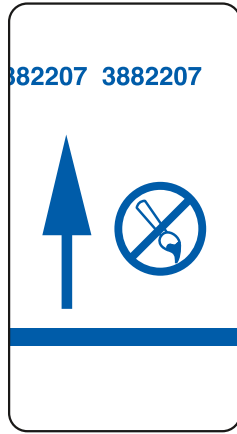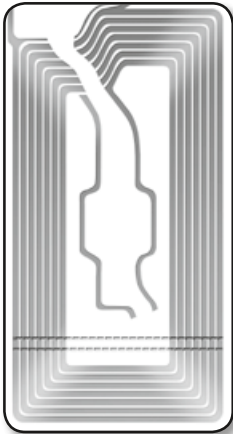

JULIAN DATE SHOWN IS EXAMPLE ONLY

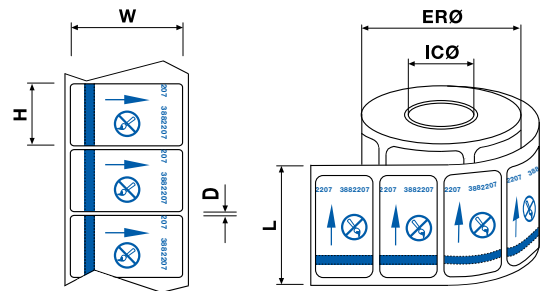

Characteristics	2K = 2,000 Labels (100% good labels/roll)
Product Description	615 Shoe Label
Part No:	7907684
Label Dimensions (WxH):	55.88 x 30.73 mm / 2.2" x 1.2"
Distance between labels (D):	3.66 mm / 0.15"
Liner Width (L):	56.17 mm / 2.2"
External Roll Diameter (ER):	Ø 183 mm / 7.2"
Inner Core Diameter (IC):	Ø 76.2 mm / 3"
Face Sheet:	White Uncoated Litho Paper
Adhesive:	Permanent, general purpose
Labels per roll:	2,000
Labels per case:	16,000
Weight roll:	1.40 kg
Weight case:	14.5 kg
Frequency (MHz) +/-5%:	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	1.5 Kv
*Minimum order quantity (MOQ)	2,000 (1 Roll)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high

\*Unless otherwise specified in contractual conditions

\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture




For any questions regarding this or any other labelling process contact your local Checkpoint representative.





Enhanced Performance

## 710 EP WHITE



Characteristics	2K = 2,000 Labels	4K = 4,000 Labels	8K = 8,000 Labels
Product Description:	710 EP White	710 EP White	710 EP White
Part No:	7174997	7183170	7248352
Label Dimensions (WxH):	34.6 x 41.1 mm 1.37" x 1.6"	34.6 x 41.1 mm 1.37" x 1.6"	34.6 x 41.1 mm 1.37" x 1.6"
Distance between labels (D):	2.30 mm / 0.09"	2.30 mm / 0.09"	2.30 mm / 0.09"
Liner Width (L):	34.29 mm / 1.35"	34.29 mm / 1.35"	34.29 mm / 1.35"
External Roll Diameter (ER):	Ø 165 mm / 6.5"	Ø 256 mm / 10.07"	Ø 375 mm / 14.76"
Inner Core Diameter (IC):	Ø 76.2 mm / 3"	Ø 76.2 mm / 3"	Ø 152 mm / 5.98"
Face Sheet:	White Thermal Transfer	White Thermal Transfer	White Thermal Transfer
Adhesive:	Permanent, general purpose	Permanent, general purpose	Permanent, general purpose
Labels per roll:	2,000	4,000	8,000
Labels per case:	10 x 2K / case	5 x 4K / case	3 x 8K / case
Weight roll:	0.96 kg / 2.11 lbs	1.84 kg / 4.05 lbs	3.84 kg / 8.46 lbs
Weight case:	9.88 kg / 21.78 lbs	10.27 kg / 22.64 lbs	11.25 kKg / 24.8 lbs
Frequency (MHz) +/-5%:	8.2 MHz	8.2 MHz	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	8 Kv (minimum)	8 Kv (minimum)	8 Kv (minimum)
*Minimum order quantity (MOQ)	2,000 (1 Roll)	4,000 (1 Roll)	8,000 (1 Roll)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high

\*Unless otherwise specified in contractual conditions

\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture


For any questions regarding this or any other labelling process contact your local Checkpoint representative.





Enhanced Performance

## 710 EP BIL

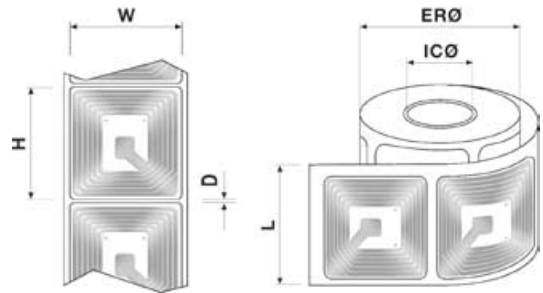

Characteristics	2K = 2,000 Labels	4K = 4,000 Labels
Product Description:	710 EP BIL 76/228 4KR	710 EP BIL 153/336 8KR
Part No:	7196842	7161083
Label Dimensions (WxH):	34.6 x 41.1 mm / 1.37" x 1.6"	34.6 x 41.1 mm / 1.37" x 1.6"
Distance between labels (D):	2.30 mm / 0.09"	2.30 mm / 0.09"
Liner Width (L):	34.29 mm / 1.35"	34.29 mm / 1.35"
External Roll Diameter (ER):	Ø 165 mm / 6.5"	Ø 256 mm / 10.07"
Inner Core Diameter (IC):	Ø 76.2 mm / 3"	Ø 76.2 mm / 3"
Face Sheet:	Clear Polypropylene	Clear Polypropylene
Adhesive:	Permanent, general purpose	Permanent, general purpose
Labels per roll:	2,000	4,000
Labels per case:	10 x 2K (20,000)	5 x 4K (20,000)
Weight roll:	0.96 kg / 2.11 lbs	1.84 kg / 4.05 lbs
Weight case:	9.88 kg / 21.78 lbs	10.27 kg / 22.64 lbs
Frequency (MHz) +/-5%:	8.2 MHz	8.2 MHz
Electrostatic Discharge		
Tolerance (ESD):	8 Kv (minimum)	8 Kv (minimum)
*Minimum order quantity (MOQ)	2,000 (1 Roll)	4,000 (1 Roll)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high

\*Unless otherwise specified in contractual conditions

\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture



For any questions regarding this or any other labelling process contact your local Checkpoint representative.





Enhanced Performance

## 2815 EP POCKET TAG

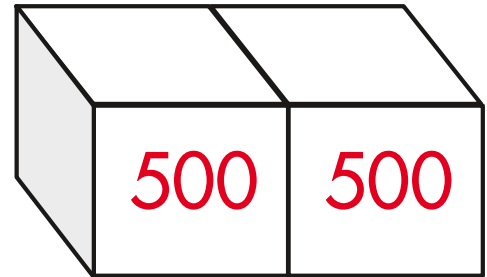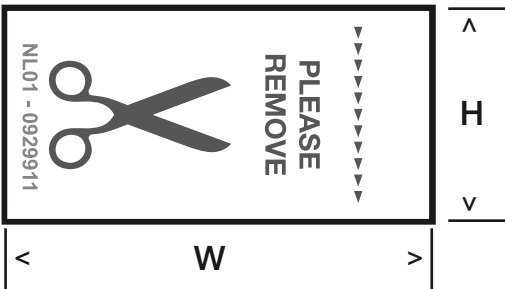

### Characteristics

Product Description	2815 EP Pocket Tag
Part No:	7247413
Label Dimensions (WxH):	49 x 30 mm / 1.92" x 1.18"
Adhesive:	None
Labels per pack:	500
Labels per case:	1,000
Weight per pack:	0.71 kg / 1.56 lbs
Weight per case:	1.42 kg / 3.12 lbs
Frequency (MHz) +/-5%:	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	7.5Kv (minimum)
*Minimum order quantity (MOQ)	500 (1 Pack)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high

\*Unless otherwise specified in contractual conditions

\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture



For any questions regarding this or any other labelling process contact your local Checkpoint representative.





Enhanced Performance

## 410 EP POCKET TAG

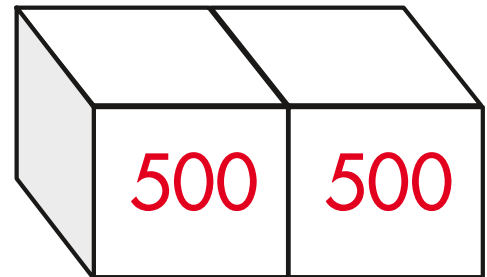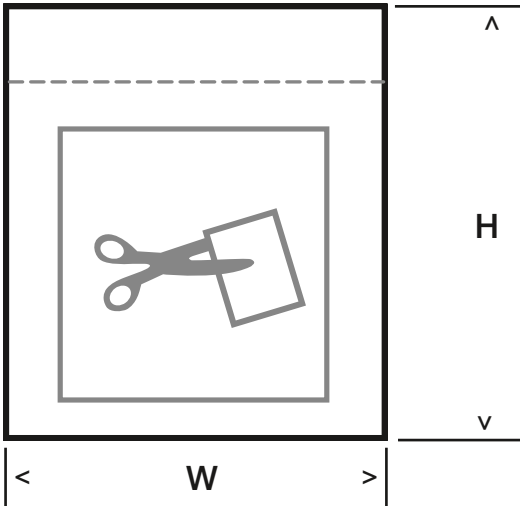

### Characteristics

Product Description	410 EP Pocket Tag
Part No:	09293022
Label Dimensions (WxH):	50 x 57 mm / 1.96" x 2.24"
Adhesive:	None
Labels per pack:	500
Labels per case:	1,000
Weight per pack:	0.71 kg / 1.56 lbs
Weight per case:	1.42 kg / 3.13 lbs
Frequency (MHz) +/-5%:	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	7.5 Kv (minimum)
*Minimum order quantity (MOQ)	500 (1 Pack)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high

\*Unless otherwise specified in contractual conditions

\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture



For any questions regarding this or any other labelling process contact your local Checkpoint representative.





Enhanced Performance

## 710 EP POCKET TAG

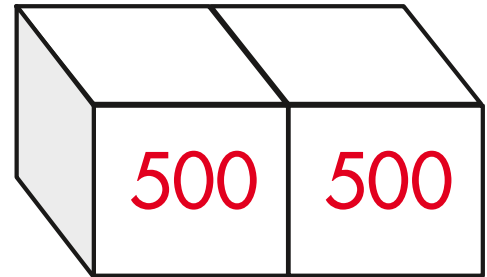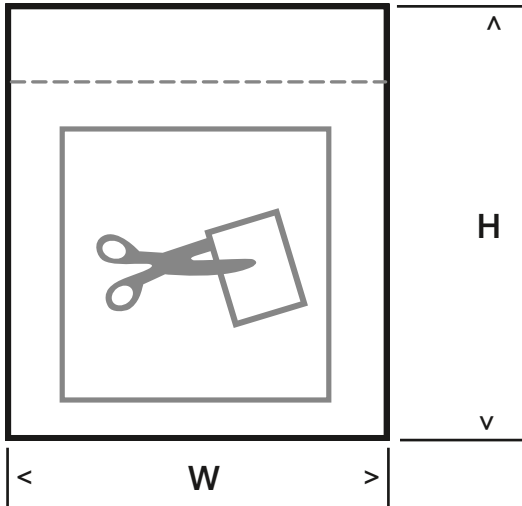

### Characteristics

Product Description:	710 EP Pocket Tag
Part No:	9293022
Label Dimensions (WxH):	57 x 50 mm / 2.24" x 1.96"
Labels per pack:	500
Labels per case:	2 x 500 (1,000)
Weight pack:	0.709 kg / 1.56 lbs
Weight case:	1.418 kg / 3.1 lbs
Frequency (MHz) +/-5%:	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	7.5 Kv (minimum)
*Minimum order quantity (MOQ)	500 (1 Pack)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high

\*Unless otherwise specified in contractual conditions


\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.



Enhanced Performance

## 410 EP DROP IN TAG

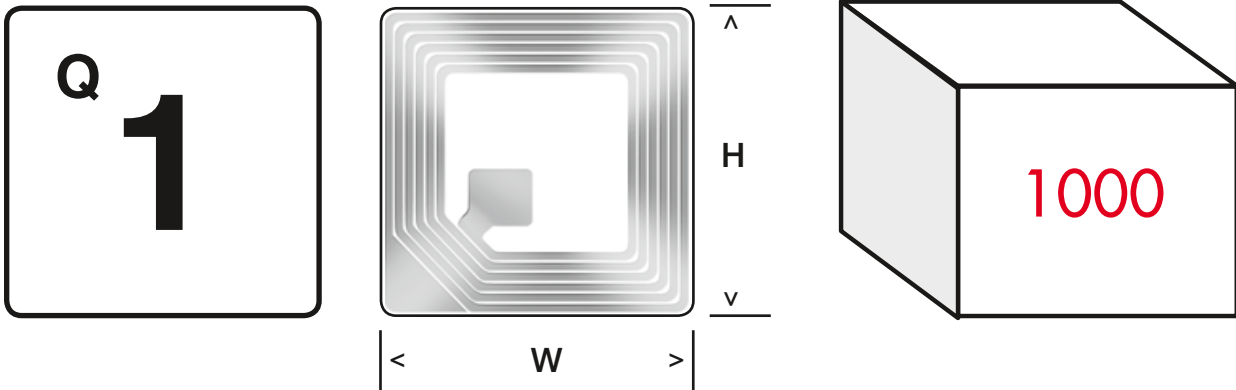

Characteristics	
Product Description:	410 EP Drop In Tag
Part No:	9414759
Label Dimensions (WxH):	41 x 41 mm / 1.6" x 1.6"
Labels per pack:	1,000
Labels per case:	10 x 1,000 (10,000)
Weight pack:	0.680 kg / 1.5 lbs
Weight case:	6.820 kg / 15 lbs
Frequency (MHz) +/-5%:	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	7.5 Kv (minimum)
*Minimum order quantity (MOQ)	1,000 (1 Pack)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high

\*Unless otherwise specified in contractual conditions

\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.





Enhanced Performance

## FIT TAG

Important Considerations for FIT Tag integration during the confection process:

- RF FIT (Radio Frequency Fully Integrated Tag) Tags are recommended for use with those apparel garments and accessories that cannot be protected using the Drop In, Pocket Tag, Hard Tags or adhesive RF labels.
- The FIT Tag's shape and colour can be fully customised (size, colour, material etc.) according to client requirements.
- Unless otherwise stated RF FIT Tags should always be applied to the LEFT side of the garment.



Price Tickets are delivered in exact quantities so do not have standard packaging specifications

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high


\*Unless otherwise specified in contractual conditions

\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.



## RF HARD TAG@SOURCE (HT@S)

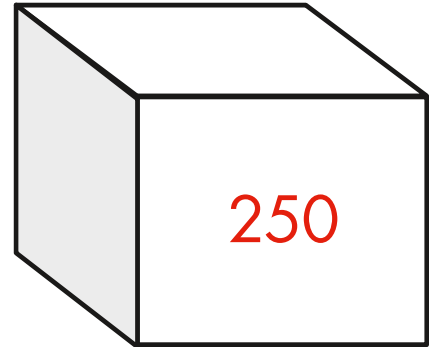

Characteristics	
Product Description	RF Hard Tag@Source
Part No:	7321712
Tag Dimensions (LxWxH):	50 x 26 x 16 mm / 2.0" x 1.0" x 0.6"
Colour:	grey RAL 7030, white RAL 9002
Material:	Plastic (ABS)
Tags per pack:	250
Tags per case:	4 x 250 (1,000)
Weight pack:	2.25 kg / 4.96 lbs
Weight case:	9.0 kg / 19.8 lbs
Frequency (MHz) +/-5%:	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	7.5 Kv (minimum)
*Minimum order quantity (MOQ)	250 (1 Pack)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C  
 Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years\*\* • Cases should never be stacked more than 5 high

\*Unless otherwise specified in contractual conditions

\*\*RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.

Checkpoint Systems is a global leader in shrink management, merchandise visibility and apparel labelling solutions. Checkpoint partners with retailers and their suppliers to reduce shrink, increase shelf availability, ensure labelling consistency and achieve operational excellence. Checkpoint's solutions enable retailers to enhance the shopping experience for consumers, and grow their businesses profitably.

Electronic Article Surveillance



Solutions @ Source



High-Theft Solutions



Shrink Management Software



Merchandise Visibility



Apparel Labelling Solutions



Video, Alarm and Monitoring Services



Retail Merchandising Solutions

CONTACT  
Solutions\_Source@checkpt.com

